


**Instructions:** This hitch lock can be fitted with the caravan/trailer hitched to a towing vehicle, or unhitched, as required.



**Fig 1**

Remove the lock by inserting the key and turning clockwise, twist and pull to remove lock holder.

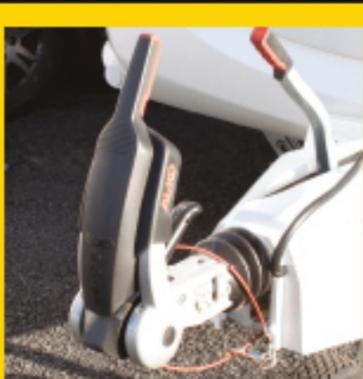


**Fig 2**

If one is fitted, lift the stabiliser handle into upright position. If fitting the hitch lock with the caravan/trailer hitched to the towing vehicle, ensure this has been done correctly. Hitched or unhitched, ensure the hitch handle is fully down before attempting to fit the hitch lock.



**Fig 3**

Fit hitch lock cover by ensuring that the hitch lock handle goes into recess of the cover, allow to sit in its natural position.

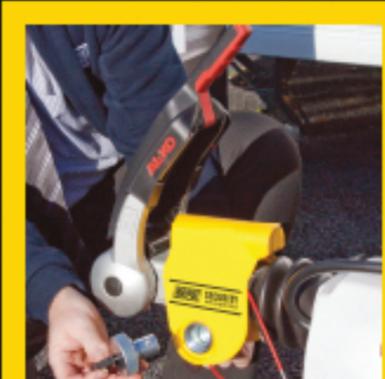


**Fig 4**

The locking bolt can be fitted from either side by passing through the holes in the hitch lock cover and inserting lock holder. To lock turn key anti-clockwise and remove.



**Fig 5**

Push down stabiliser arm, if fitted. If fitting while hitched, the caravan/trailer is now secured to the towing vehicle. **Note : Do NOT tow with the hitch lock fitted.**

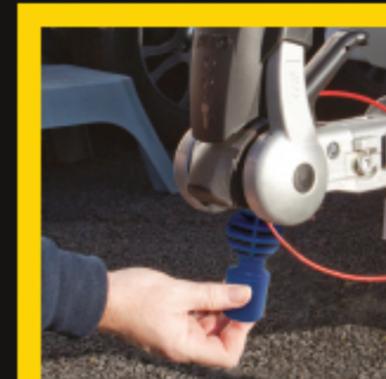

**Fig 6**

For increased security when fitting unhitched, insert a security ball such as **SH54126** (not supplied) before lowering the hitch handle.