

Motorcycle Tie Down Strap Kit (MP68054) – User Guide

IMPORTANT

ONLY to be used on a trailer which is specifically designed to transport motorcycles. It must have suitable fixing points at the front, middle and rear of the trailer.

This product is designed for additional stability and should only be used in conjunction with additional tie-down straps which secure the motorcycle at the middle and rear of the trailer.

The attachment of a motorcycle to a trailer is safety critical and beyond the control of the strap manufacturer.

During the journey, frequently check the tension of the straps and the security of the motorcycle being transported.

Ensure the motorcycle does not come in contact with the trailer's bodywork and provide protection as required.

The straps should be protected against friction, abrasion and damage from loads with sharp edges by using protective sleeves and /or corner protectors.

Straps should never be used when knotted.

Do not over tighten the strap as this may damage the load you are tying down. Mechanical aids such as levers, bars etc. should not be used.

Every time before use, check the tie down kit for security of fittings or any sign of wear and tear. **DO NOT** use if worn or damaged.

FITTING INSTRUCTIONS

Carefully manoeuvre the motorcycle onto the trailer ensuring the front wheel is pulled firmly into the trailer's front wheel holder.

It is recommended 2 people hold the motorcycle firmly in place whilst securing the tie down straps.

Remove any additional accessories (ie handle bar end mirrors) from the handle bars.

Attach each red loop over the handle bar grips.

Insert one end of the ratchet strap through the blue loop end. Secure the opposite end to a suitable fixing point at the front of the trailer.

Once in position; ratchet down the strap securely to ensure it is fully tensioned.

When releasing the ratchet; ensure the motorcycle is held firmly to avoid damage to the motorcycle or trailer and the potential for injury.

Ratchet user guide

Insert one end of the strap through the opening (B). The ratchet is tightened by moving the handle (A) backwards & forwards. The cargo is secured by bringing the handle (A) to a closed position (FIG 1). To remove the strap; press side lever (C) and move handle (A) to a flat position (FIG 2). The strap can now be removed from opening (B).

FIG 1


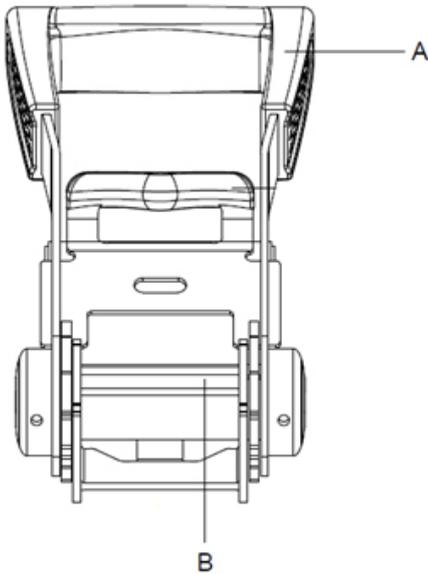


FIG 2

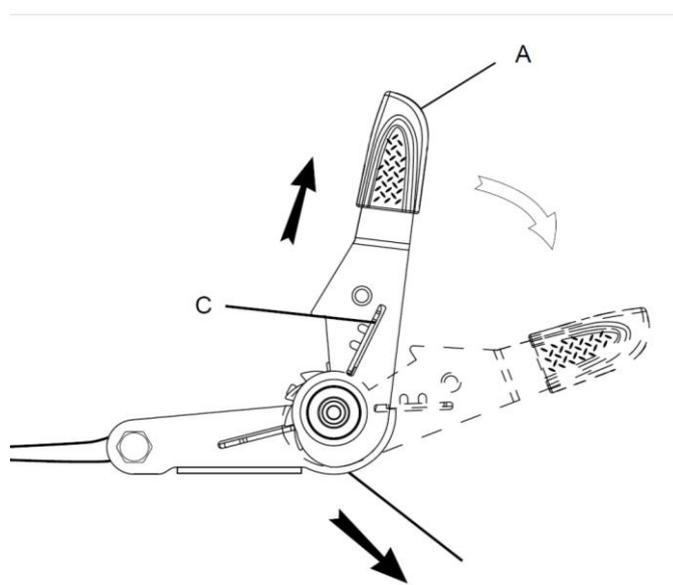

Keep these instructions for future reference. When passing on to others be sure to also include all documentation. The instruction leaflet is also available on our website: www.maypoleltd.com